


XPower™ Pocket Inverter 100 & 175

100 Watt and 175 Watt
DC to AC Mini Inverters

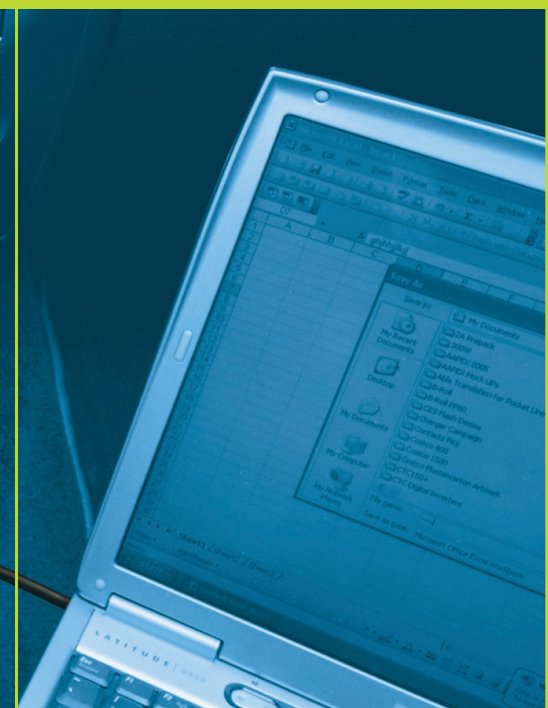

A Wall Outlet in Your Pocket

The XPower™ Pocket Inverter 100 and 175 are mini inverters that utilize advanced electronics to convert 12 volt DC battery power from a vehicle into 120 volt household AC electricity. When your laptop, portable game console, or any other mobile device runs out of battery power, simply plug it into the Pocket Inverter and keep going.

Each XPower Pocket Inverter model includes a three-prong household AC outlet and a USB charge port, allowing you to operate and recharge a wide range of mobile devices such as a cell phone, iPod™, BlackBerry™, iPaq™, Palm™ and more. At only 0.30 pounds, these mini inverters fit almost anywhere, such as a pocket, laptop bag, vehicle console or glove box.

Product Features

- ▶ Converts 12 volt DC power from a vehicle battery into 120 volt AC power
- ▶ Three-prong AC outlet to handle all chargers and adapters for mobile electronics
- ▶ USB charge port
- ▶ Backlit LED on/off power indicator
- ▶ DC cable with vehicle
- ▶ Compact and lightweight
- ▶ One-year warranty

Protection Features

- ▶ Over-temperature shutdown
- ▶ Low-battery voltage shutdown (10.5 volts DC with automatic reset)
- ▶ Overload shutdown
- ▶ Electronic Ground Fault Circuit Interrupter (GFCI)



Xantrex Technology Inc.

Headquarters
8999 Nelson Way
Burnaby, British Columbia
Canada V5A 4B5

5916 - 195th Street NE
Arlington, WA
USA 98223

www.xantrex.com

www.preparedwithpower.com/portable

XPower Pocket Inverter 100

AC output power (max. continuous)	80 W
AC peak output power (5 min.)	100 W
AC input voltage range	10.5 - 15.5 Vdc
Low voltage shutdown	Yes (10.5 Vdc)
Output voltage	120 Vac 60 Hz
USB output power (continuous)	0.5 A
Dimensions (L x W x H)	3.95 x 2.6 x .93" (10.0 x 6.5 x 2.4 cm)
Weight	0.30 lb (0.14 kg)
Warranty	One year
Part Number	813-0281
UPC	715535113957

XPower Pocket Inverter 175

AC output power (max. continuous)	130 W
AC peak output power (5 min.)	175 W
AC input voltage range	10.5 - 15.5 Vdc
Low-voltage shutdown	Yes (10.5 Vdc)
Output voltage	120 Vac 60 Hz
USB output power (continuous)	0.5 A
Dimensions (L x W x H)	3.95 x 2.6 x .93" (10.0 x 6.5 x 2.4 cm)
Weight	0.30 lb (0.14 kg)
Warranty	One year
Part Number	813-0291
UPC	715535113964

Note: Specifications subject to change without notice

XPower Pocket Inverter 100 Packaging Specifications

Packaging	Individual (Gift Box)	Inner Carton	Master Carton
Quantity	1	5	10
Size (L x W x H)	8.8 x 7.6 x 9.8" (22.5 x 19.5 x 25 cm)	8.8 x 7.6 x 9.8" (22.5 x 19.5 x 25 cm)	16.1 x 9.5 x 10.7" (41 x 24.3 x 27 cm)
Weight	0.63 lb (0.26 kg)	3.51 lb (1.6 kg)	7.39 lb (3.3 kg)

XPower Pocket Inverter 175 Packaging Specifications

Packaging	Individual (Gift Box)	Inner Carton	Master Carton
Quantity	1	5	10
Size (L x W x H)	5.75 x 3 x 10" (14.6 x 7.6 x 25 cm)	10.7 x 7.6 x 9.8" (27.3 x 19.5 x 25 cm)	16.1 x 11.4 x 10.6" (41 x 29 x 27 cm)
Weight	0.80 lb (0.36 kg)	4.48 lb (2.0 kg)	9.43 lb (4.2 kg)

